

Kubik

90 x 90mm

- Square Downlight (fixed)
- Ideal for Residential interiors
- Recessed baffle for lower glare
- Front-loading for easy re-lamping
- Suitable for low ceiling voids

General

Type	Fixed Downlight
Mounting	Ceiling Recessed
IP-Rating	IP20 / IP44
Construction	Diecast Aluminium
Operating Temp	-10°c to +40°c
Protection	Class 2
Certification	CE (EN 60598-1)
Warranty	5 years



Order Code

①	→	②	→	③
Finish		LED Engine		Control Gear
		8.9w .9 80 CRI .8 2700k / 12° beam 27.12		Phase-cut .P
		12.2w .12 90 CRI .9 2700k / 24° beam 27.24		1-10v .A
		2700k / 38° beam 27.38		DALI .D
		3000k / 12° beam 30.12		Switching .S
		3000k / 24° beam 30.24		*None .N
		3000k / 38° beam 30.38		
		4000k / 12° beam 40.12		
		4000k / 24° beam 40.24		
		4000k / 38° beam 40.38		
①	→	②		
Finish		Lamp		
		GU10 (not incl) .10		
		MR16 (not incl) .16		

Add-ons	→	Honeycomb Filter .HC
		Frosted Lens .FL

Ordering Info:

1. Example: **A339W.9.827.38.P**
2. *None: Where Control Gear is not required standard warranty terms will not apply (see warranty document > akclighting.com)
3. Add-ons: Include Add-on Code(s) after Order Code - more than one Add-on can be specified (where applicable)

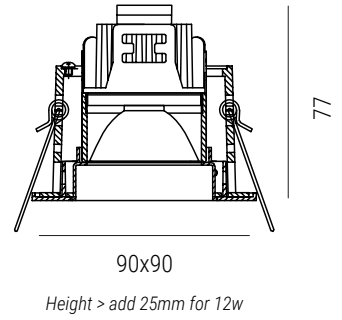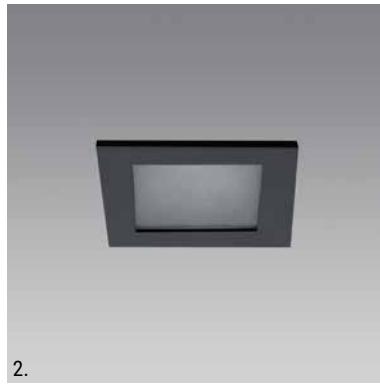

Variant	Finish	Cut-out	Tilt	Rotate
1. Kubik	White A339W	78 x 78mm	-	-
	Black A339B			
2. Kubik IP44	White A340W	78 x 78mm	-	-
	Black A340B			

*IP44 includes frosted glass as standard (clear glass available on request)

