

# Petite

Ø62mm  
Ø74mm

- Compact COB Downlights
- Ideal for Residential/Hospitality
- Fixed variant IP54 as standard
- Pinhole variant available
- Suitable for low void ceilings

## General


Type	Fixed / Adjustable Downlight
Mounting	Ceiling Recessed
IP-Rating	IP54 (Fixed) / IP20 (Adj)
Construction	Diecast Aluminium
Operating Temp	-10°c to +40°c
Protection	Class 2
Certification	CE (EN 60598-1)
Warranty	5 years

## Technical Data

Power Output	9.2w		
Beam	13°	25°	38°
*Lumen Output	785 lm	789 lm	792 lm
CRI	80 (90 on request)		
Lifetime	50,000h (B80, L10)		
Control Gear	Remote Driver		
Drive Current	500mA		
Forward Voltage	18.4v		

\*Delivered lumens, 3000k (80 CRI)

## Order Code



Finish

LED COB

80 CRI	.8	2700k / 13° beam	27.13
90 CRI	.9	2700k / 25° beam	27.25
		2700k / 38° beam	27.38
		3000k / 13° beam	30.13
		3000k / 25° beam	30.25
		3000k / 38° beam	30.38
		4000k / 13° beam	40.13
		4000k / 25° beam	40.25
		4000k / 38° beam	40.38

Control Gear (Pls state if 350ma or 500ma is required, eg. .P500)



Phase-cut	.P
1-10v	.A
DALI	.D
Switching	.S
*None	.N

### Ordering Info:

1. Example: **A375W.827.38.P**
2. \*None: Where Control Gear is not required standard warranty terms will not apply (see warranty document)
3. Add-ons: Include Add-on Code(s) after Order Code - more than one Add-on can be specified
4. LED: 2700k / 4000k .ies file(s) on request - contact us
5. This fixture uses a reflector for secondary optics


Add-ons

Honeycomb Filter	.HC
Frosted Lens	.FL

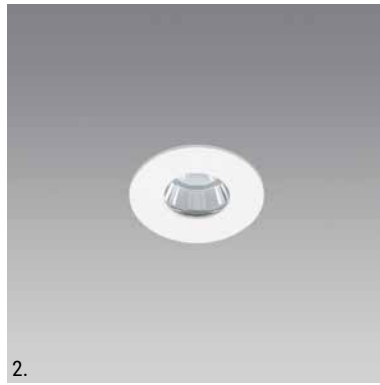

Variant	Finish	Cut-out	Tilt	Rotate
1. Petite	White <b>A375W</b>	Ø54mm	-	-
	Black <b>A376B</b>			
2. *Petite Pinhole	White <b>A376W</b>	Ø54mm	-	-
	Black <b>A376B</b>			

\*25mm aperture



Variant	Finish	Cut-out	Tilt	Rotate
3. Petite Adjustable	White <b>A377W</b>	Ø67mm	25°	-
	Black <b>A377B</b>			