

General

Type	Fixed Wall Light
Mounting	Wall Recessed
IP-Rating	IP20
Construction	Diecast Aluminium
Operating Temp	-10°c to +40°c
Protection	Class 2
Certification	CE (EN 60598-1)
Warranty	3 years (refer to warranty document)




LED (SMD)

Power Output	3w
CCT	2700k 3000k 4000k
*Lumen Output	120 lm
CRI	80 (90 on request)
Optics	Asymmetric (PC Diffuser)
Lifetime	30,000h (B80, L10)
Control Gear	Remote Driver (12vDC Constant Voltage)

Specification



Order Code:

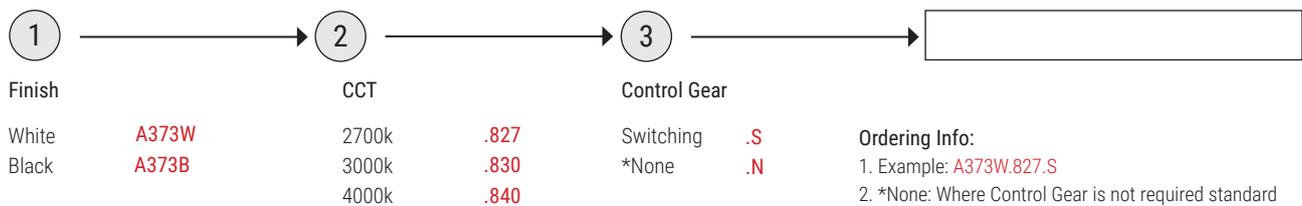


Ordering Info:

- 1. Example: A373W.827.S
- 2. *None: Where Control Gear is not required standard warranty terms will not apply (see warranty document)
- 3. Driver can be integrated on request
- 4. Multiple fixtures can be connected to one driver if wired in parallel > contact us for technical details

Technical Drawings (mm)

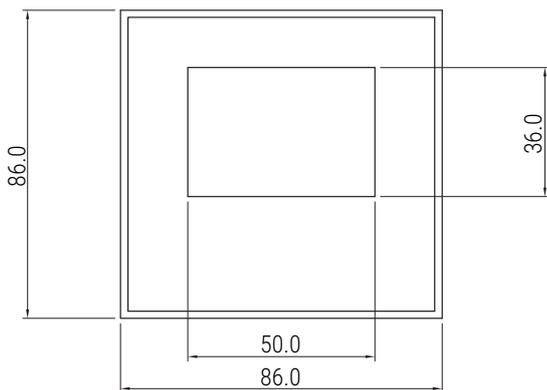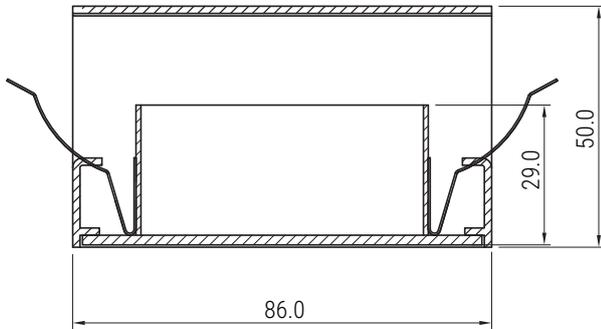

Cut-out = 87 x 87

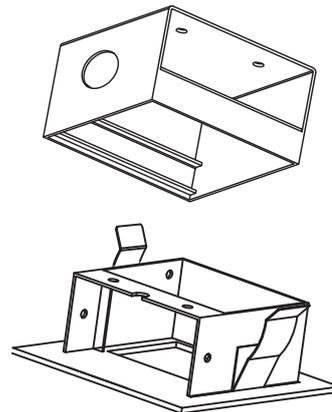

LED Notes

- 1.*Lumen Output - for fixtures with a recessed baffle / snoot / frosted lens the lumen output may be lower than the stated figures - contact us for the latest .ies file(s) to ensure accuracy of data
2. LED Engine / LED COB use only 3-step MacAdam Ellipse LEDs, tested @ 25°C
3. Control Gear (by others) is subject to both specification and availability
4. LED Engine / LED COB - Lumen output is $\pm 7\%$ / CCT tolerance is $\pm 150k$
5. Operating Voltage: 220 - 240v, 50/60 Hz
6. Subject to technical changes without notice

Fixture Notes

1. GU10/MR16 Lamps - Fixture height may vary according to the sizes stated by the respective Lamp manufacturer
2. Technical Drawings - tolerance of $\pm 1mm$ applies to all stated dimensions
3. Suitable for Plasterboard Ceilings (thickness: 9mm - 30mm), unless stated otherwise
4. Custom RAL finishes are available on request (may be subject to MOQ)
5. Standard finishes are Powder-coated White (RAL 9003) and Black (RAL 9005)
6. For Panel (MDF, etc) and Concrete applications pls contact us with details of the Project requirements