

Tiny

Ø36mm

Ø46mm

- Micro Downlights
- Ideal for Residential/Hospitality
- Suitable for Gypsum/Panel
- Ideal for joinery applications
- Flush-mount option available

General


Type	Fixed / Adjustable Downlight
Mounting	Ceiling Recessed
IP-Rating	IP20
Construction	Diecast Aluminium
Operating Temp	-10°C to +40°C
Protection	Class 2
Certification	CE (EN 60598-1)
Warranty	5 years

LED COB

Power Output	1w (@350mA) / 2.1w (@700mA)		
Beam	15°	27°	43°
*Lumen Output	118 lm	118 lm	118 lm
CRI	80		
Lifetime	50,000h (B80, L10)		
Control Gear	Remote Driver		
Drive Current	350mA		
Forward Voltage	-		

*Lumen output = delivered lumens @ 1w / 3000k

Order Code







Finish	LED COB	Control Gear (non-dimmable only)
	2700k / 15° beam	350mA
	2700k / 27° beam	700mA
	2700k / 43° beam	
	3000k / 15° beam	
	3000k / 27° beam	
	3000k / 43° beam	
	4000k / 15° beam	
	4000k / 27° beam	
	4000k / 43° beam	


Ordering Info:

1. Example: **A384W.827.43.350**
2. Fixture comes with non-dimmable Control Gear as standard > this fixture is not dimmable.
3. Fixture can be mounted in Gypsum (9-18mm) and Panel (9-18mm)
4. LED: 2700k / 4000k .ies file(s) on request - contact us
5. Lumen output @ 700mA = 188 lm

Add-ons → Flush-mount Kit **.FMK**

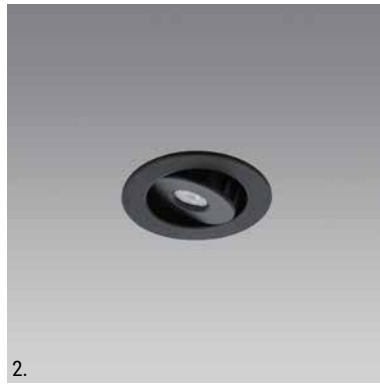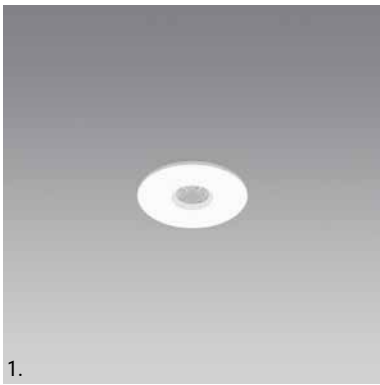

Variant	Finish	Cut-out	Tilt	Rotate
1. Tiny	White A384W	Ø71mm	30°	355°
	Black A384B			
2. Tiny Adj	White A386W	Ø65mm	30°	355°
	Black A386B			



Add-on > Flush-mount Kit (.FMK)

Ø130mm > For Tiny Series